

PROJECT NAME: \_\_\_\_\_ LOCATION: \_\_\_\_\_

ITEM: \_\_\_\_\_ MODEL: \_\_\_\_\_

## Top Mount Reach In Solid Door Refrigerator



CSD-2DR-TSI-HC

Centaur model \_\_\_\_\_ Exterior finish: to be stainless steel front, sides & top, rear back aluminum. Interior finish: stainless steel. Controller to be Dixell solid state with digital display, self diagnostic, easily programmable. Freezer is top mount condensing unit with capillary tube system, freezer temperature ranges -1° to -7°F. Refrigerant to be environmentally friendly with R290. Coils to be coated aluminum/copper. Condensate heater to have an integral hot gas refrigerant line built into condensate pan. Freezer door frames to have foam-in place heater wire. All single door units are field reversible. Doors stand open pass 90 degrees, self closing less than 90 degrees. Shelves to be heavy duty wire with stand-off to provide excellent air flow, PVC coated. Casters to be factory mounted. Unibody construction with foamed sides from top to bottom, CFC free polyurethane insulation. ETL Listed and ETL Sanitation Listed.

## FEATURES LIST

### CSD-1DR-TSI-HC, CSD-2DR-TSI-HC CSD-3DR-TSI-HC

- Solid state thermostat w/ digital display
- Full length stainless handles
- Exterior stainless steel front and sides
- Interior stainless steel w/LED interior lights
- Field reversible 1-door unit
- 3 heavy duty baked epoxy racks
- Self closing doors remain open past 90°
- Non twist solid mullions 2 & 3 door units
- Environmentally friendly R290
- EZ slide out condenser
- Heater in condensate pan
- Whisper quiet
- Solid construction
- Holds sheet pans front to back
- High efficiency polyurethane insulation
- Zero clearance sides, 2" rear
- Energy Star Approved (1 & 2 door models)
- WARRANTY: 2 Years Parts and Labor and Additional 3 Years on Compressor.

\*Not suitable for installation in a non-commercial or residential applications.


Certified To ANSI/  
NSF 7 Standards



As continued product improvement is a policy,  
specifications are subject to change without notice

Approvals

## PLAN VIEW

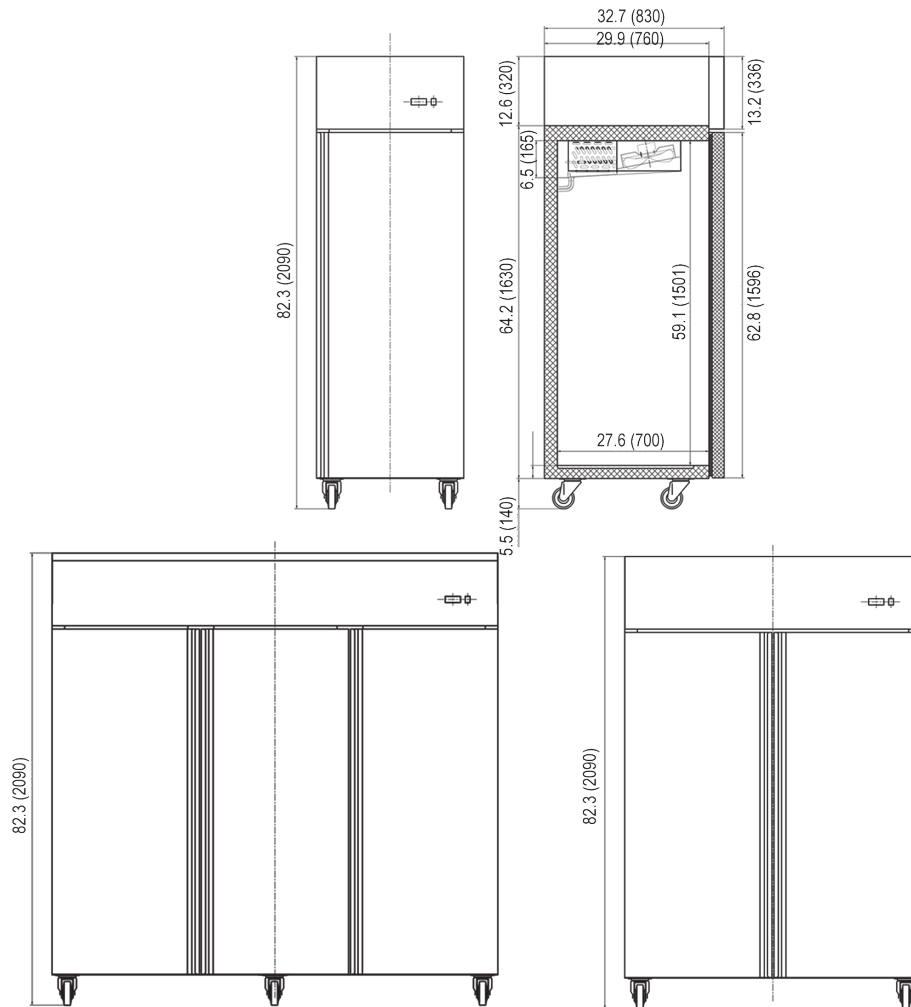

## DIMENSIONAL DATA

CSD-1DR-TSI-ES-HC	CSD-2DR-TSI-HC	CSD-3DR-TSI-HC
<p><b>Capacity:</b> 1 swing door and 3 shelves</p> <p><b>Dimensions:</b> Overall Length = 27" Overall Depth = 34.3" Overall Height = 82.3"</p>	<p><b>Capacity:</b> 2 swing doors and 6 shelves</p> <p><b>Dimensions:</b> Overall Length = 54" Overall Depth = 34.3" Overall Height = 82.3"</p>	<p><b>Capacity:</b> 3 swing doors and 9 shelves</p> <p><b>Dimensions:</b> Overall Length = 81" Overall Depth = 34.3" Overall Height = 82.3"</p>
<p><b>HP:</b> 1/5      <b>BTU:</b> 1670 <b>Voltage:</b> 115/60/1    <b>Amps:</b> 3.0 <b>NEMA Plug:</b> 5-15P <b>Cord Length:</b> 10</p>	<p><b>HP:</b> 1/4      <b>BTU:</b> 2380 <b>Voltage:</b> 115/60/1    <b>Amps:</b> 4.5 <b>NEMA Plug:</b> 5-15P <b>Cord Length:</b> 10</p>	<p><b>HP:</b> 1/2      <b>BTU:</b> 3200 <b>Voltage:</b> 115/240    <b>Amps:</b> 7.0 <b>NEMA Plug:</b> 5-15P <b>Cord Length:</b> 10</p>
<p><b>Shipping Information:</b> Crated Weight: 350 lbs.</p>	<p><b>Shipping Information:</b> Crated Weight: 518 lbs.</p>	<p><b>Shipping Information:</b> Crated Weight: 669 lbs.</p>