

CSD-1DR-BAL-ES-HC CSD-2DR-BAL-ES-HC CSD-3DR-BAL-HC Bottom Mount Reach In Solid Door Refrigerator

PROJECT NAME:

\_ LOCATION: \_\_\_\_\_

ITEM: \_\_\_\_

\_\_\_\_\_ MODEL: \_\_\_\_



Centaur model Exterior finish: to be stainless steel front, sides & top, rear back aluminum. Interior finish: white aluminum, stainless steel floor with plastic door liner. Controller to be Dixell solid state with digital display, self diagnostic, easily programmable. Refrigeration is bottom mount condensing unit with capillary tube system, cooler temperature range 34-38F. Refrigerant to be environmentally friendly with R290. Coils to be coated aluminum/copper. Condensate heater to have an integral hot gas refrigerant line built into condensate pan. All single door units are field reversible. All doors stand open pass 90 degrees, shelf closing less than 90 degrees. Shelves to be heavy duty wire with stand-off to provide excellent air flow, PVC coated. Casters be to factory mounted. Unibody construction with foamed sides from top to bottom, CFC free polyurethane insulation. ETL listed, ETL Sanitation listed.

\*Not suitable for installation in non-commercial or residential applications.



### **FEATURES LIST**

Solid state thermostat with digital

#### display

- Stainless steel front and sides
- Field reversible 1-door units
- 3 heavy duty baked epoxy racks
- Self closing doors remain open past 90°
- Non twist solid mullions on 2 & 3 door

#### units

- Environmentally friendly R290
- EZ slide out condenser
- Full length integrated door handle
- Whisper quiet
- Solid construction
- Holds sheet pans front to back
- High efficiency polyurethane insulation
- LED Interior Lighting
- Zero clearance sides, 2" rear
- \* WARRANTY: 2 Years Parts and Labor and
- Additional 3 Years on Compressor.

Specifications subject to change without notice

Approvals:






## Model# CSD-

CSD-1DR-BAL-ES-HC CSD-2DR-BAL-ES-HC CSD-3DR-BAL-HC

Hel

0

# PLAN VIEW

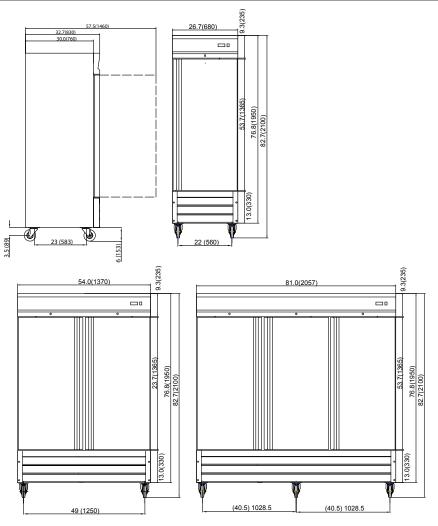

### DIMENSIONAL DATA

CSD-1DR-BAL-HC	CSD-2DR-BAL-HC	CSD-3DR-BAL-HC
Capacity:	Capacity:	Capacity:
1 swing door and 3 shelves	2 swing doors and 6 shelves	3 swing doors and 9 shelves
Dimensions:	Dimensions:	Dimensions:
Overall Length = 27"	Overall Length = 54" Overall	Overall Length = 81" Overall
Overall Depth = 33.7"	Depth = 33.7" Overall Height	Depth = 33.7" Overall Height
Overall Height = 82.7"	= 82.7"	= 82.7"
HP: 1/4	HP: 1/4	HP: 1/2
Voltage: 115/60/1 Amps: 4.5	Voltage: 115/60/1 Amps: 4.5	Voltage: 115/60/1 Amps: 7.5
BTU 1670	BTU 2380	BTU 3200
NEMA Plug: 5-15P	NEMA Plug: 5-15P	NEMA Plug: 5-15P
Cord Length: 10	Cord Length: 10	Cord Length: 10
Shipping Information:	Shipping Information:	Shipping Information:
Crated Weight: 350 lbs.	Crated Weight: 518 lbs.	Crated Weight: 669 lbs.