

PROJECT NAME: _____ LOCATION: _____

ITEM: _____ MODEL: _____

Bottom Mount Reach In Solid Door Freezer



CSD-3DF-BAL-DV

Centaur model _____ Exterior finish: to be stainless steel front, sides & top, rear back aluminum. Interior finish: White Aluminum interior and door liner. Controller to be Dixell solid state with digital display, self diagnostic, easily programmable. Freezer is bottom mount condensing unit with capillary tube system, temperature range 0-4F. Refrigerant to be environmentally friendly with R290. Coils to be coated aluminum/copper. Condensate heater to have an integral hot gas refrigerant line built into condensate pan. Freezer doors to have foam-in place heater wire. All single door unit is field reversible. All doors stand open pass 90 degrees, self closing less than 90 degrees. Shelves to be heavy duty wire with stand-off to provide excellent air flow, PVC coated. Casters to be factory mounted. Unibody construction with foamed sides from top to bottom, CFC free polyurethane insulation. ETL listed, ETL Sanitation Listed.

FEATURES LIST

CSD-1DF-BAL-HC, CSD-2DF-BAL-HC CSD-3DF-BAL-DV-HC

- Solid state thermostat with digital display
- Exterior stainless steel front & sides
- Full length stainless handles
- Field reversible 1-door unit
- 3 heavy duty baked epoxy racks
- Self closing doors remain open past 90°
- Non twist solid mullions 2 & 3 door units
- Heater in condensate pan
- Environmentally friendly R290 freon
- EZ slide out condenser
- Whisper quiet
- Solid construction w/Interior LED Lights
- Holds sheet pans front to back
- High efficiency polyurethane insulation
- Zero clearance back and 2" sides

** WARRANTY: 2 Years Parts and Labor and
Additional 3 Years on Compressor.*


Certified To ANSI/
NSF 7 Standards



As continued product improvement is a policy,
specifications are subject to change without notice

Approvals

PLAN VIEW

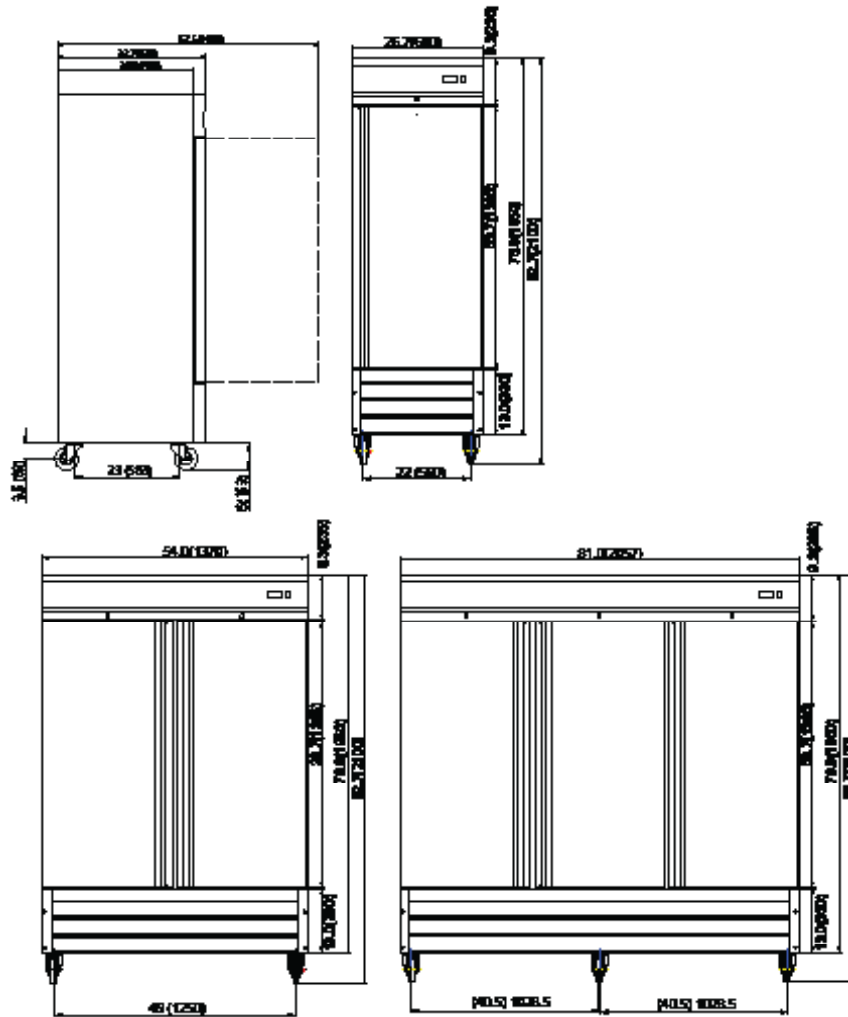

DIMENSIONAL DATA

| CSD-1DF-BAL-HC | CSD-2DF-BAL-HC | CSD-3DF-BAL-DV-HC |
|---|--|--|
| <p>Capacity: 1 swing door and 3 shelves</p> <p>Dimensions: Overall Length = 27" Overall Depth = 32.7" Overall Height = 82.7"</p> <p>HP: 5/8 BTU: 2000 Voltage: 115/60/1 Amps: 11.0 NEMA Plug: 5-15P Cord Length: 10</p> <p>Shipping Information: Crated Weight: 364 lbs.</p> | <p>Capacity: 2 swing doors and 6 shelves</p> <p>Dimensions: Overall Length = 54" Overall Depth = 32.7" Overall Height = 82.7"</p> <p>HP: 1 BTU: 3650 Voltage: 115/60/1 Amps: 12.0 NEMA Plug: 5-15P Cord Length: 10</p> <p>Shipping Information: Crated Weight: 568 lbs.</p> | <p>Capacity: 3 swing doors and 9 shelves</p> <p>Dimensions: Overall Length = 81" Overall Depth = 32.7" Overall Height = 82.7"</p> <p>HP: 1 1/4 BTU: 4498 Voltage: 115/60/1 Amps: 8.0 NEMA Plug: L 14-20P Cord Length: 10</p> <p>Shipping Information: Crated Weight: 776 lbs.</p> |