

PROJECT NAME: _____ LOCATION: _____

ITEM: _____ MODEL: _____



FEATURES LIST

- Factory assembled with mounting tabs, two S-hooks and two 6.5" (165 mm) chains. Ready to install quickly and easily
- Prefocused heat pattern covers the entire holding surface
- Consistent holding temperatures
- Sturdy extruded stainless steel housing that does not sag
- Long life metal sheathed heating elements
- One year parts and labor warranty on metal sheathed elements




ANSI/NSF 4

Specifications subject to change without notice

Approvals:

PLAN VIEW

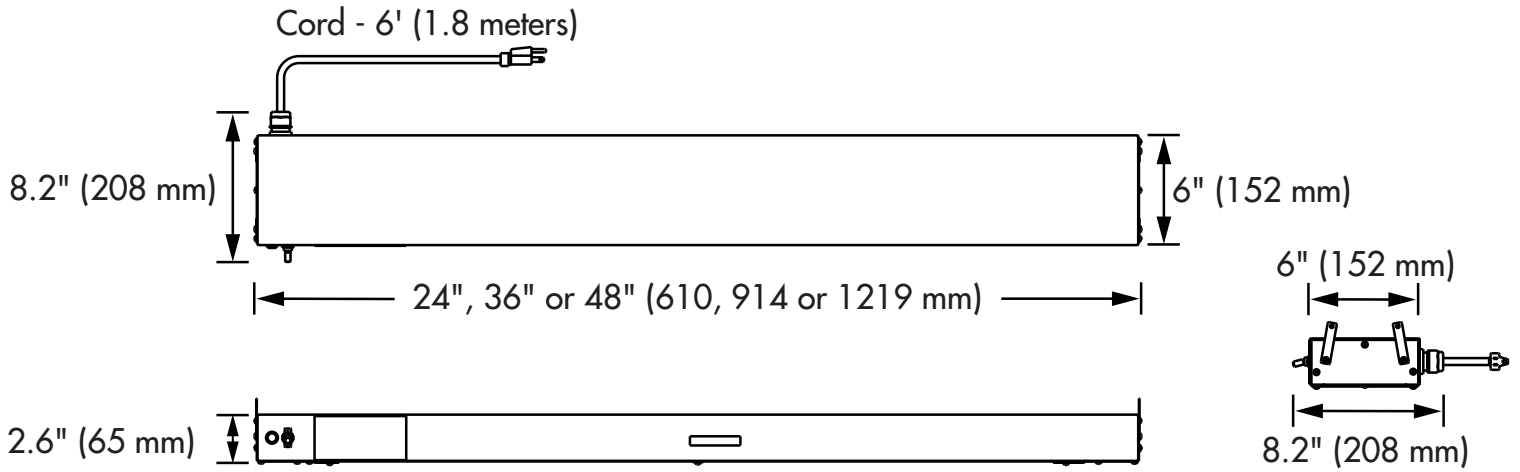

SPECIFICATIONS CENSH-24, -36, -48

Model	Dimensions (W x D x H)	Volts (Single Phase)	Watts	Amps	Plug	Ship Weight*
CENSH-24120	24" x 6" x 8.2" (610 x 452 x 65 mm)	120	500	4.2	NEMA 5-15P	8 lbs. (4kg)
CENSH-36120	36" x 6" x 8.2" (914 x 452 x 65 mm)	120	800	6.7	NEMA 5-15P	10 lbs. (5kg)
CENSH-48120	48" x 6" x 8.2" (1219 x 452 x 65 mm)	120	1100	9.2	NEMA 5-15P	12 lbs. (5kg)

* Shipping weight includes packaging.

PLUG CONFIGURATION

NEMA 5-15P

