Model#

CSD-1DF-TSI-HC CSD-2DF-TSI-HC CSD-3DF-TSI-DV-HC

PROJECT NAME:	LOCATION:
ITFM:	MODEL:

Top Mount Reach In Solid Door Freezer



Centaur model______Exterior finish: to be stainless steel front, sides & top, rear back aluminum. Interior finish: stainless steel.

Controller to be Dixell solid state with digital display, self diagnostic, easily programmable. Freezer is top mount condensing unit with capillary tube system, freezer temperature ranges -1° to -7°F.

Refrigerant to be environmentally friendly with R290. Coils to be coated aluminum/copper. Condensate heater to have an integral hot gas refrigerant line built into condensate pan. Freezer door frames to have foam-in place heater wire. All single door units are field reversible.

Doors stand open pass 90 degrees, self closing less than 90 degrees. Shelves to be heavy duty wire with stand-off to provide excellent air flow, PVC coated. Casters to be factory mounted. Unibody construction with foamed sides from top to bottom, CFC free polyurethane insulation. ETL listed & ETL Sanitation Listed

FEATURES LIST

CSD-1DF-TSI-HC, CSD-2DF-TSI-HC CSD-3DF-TSI-DV-HC

- Solid state thermostat w/ digital display
- Full length stainless handles
- Exterior stainless steel front and sides
- Interior stainless steel w/Interior LED Lights
- Field reversible 1-door unit
- 3 heavy duty baked epoxy racks
- Self closing doors remain open past 90°
- Non twist solid mullions 2 & 3 door units
- Condensate Door Heater
- Environmentally friendly R290 freon
- EZ slide out condenser
- · Heater in condensate pan
- Whisper quiet
- Solid construction
- Holds sheet pans front to back
- High efficiency polyurethane insulation
- · Zero clearance sides and 2" rear
- WARRANTY: 2 years parts and labor additional 3 years- compressor


*Not suitable for installation in a non-commercial or residential applications.





As continued product improvement is a policy, specifications are subject to change without notice

PLAN VIEW

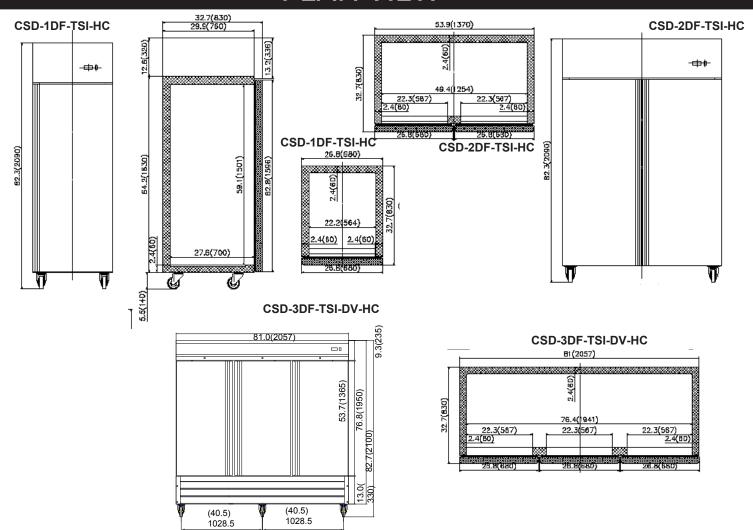

DIMENSIONAL DATA

DIMENSIONAL DATA		
CSD-1DF-TSI-HC	CSD-2DF-TSI-HC	CSD-3DF-TSI-DV-HC
Capacity: 1 swing door and 3 shelves	Capacity: 2 swing doors and 6 shelves	Capacity: 3 swing doors and 9 shelves
Dimensions: Overall Length = 27" Overall Depth = 32.7" Overall Height = 82.7"	Dimensions: Overall Length = 54" Overall Depth = 32.7" Overall Height = 82.7"	Dimensions: Overall Length = 81" Overall Depth = 32.7" Overall Height = 82.7"
HP: 5/8 BTU: 2000 Voltage: 115/60/1 Amps: 11.0 NEMA Plug: 5-15P Cord Length: 10	HP: 1 BTU: 3650 Voltage: 115/60/1 Amps: 12.0 NEMA Plug: 5-15P Cord Length: 10	HP: 1 1/4 BTU: 4498 Voltage: 115/240 Amps: 8.0 NEMA Plug: L14-20 Cord Length: 10
Shipping Information: Crated Weight: 364 lbs.	Shipping Information: Crated Weight: 568 lbs.	Shipping Information: Y-X: 208V-230V/60Hz W-Y: 115V/60Hz W-Y: 115V/60Hz

